

版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)


A

B

C

D

E

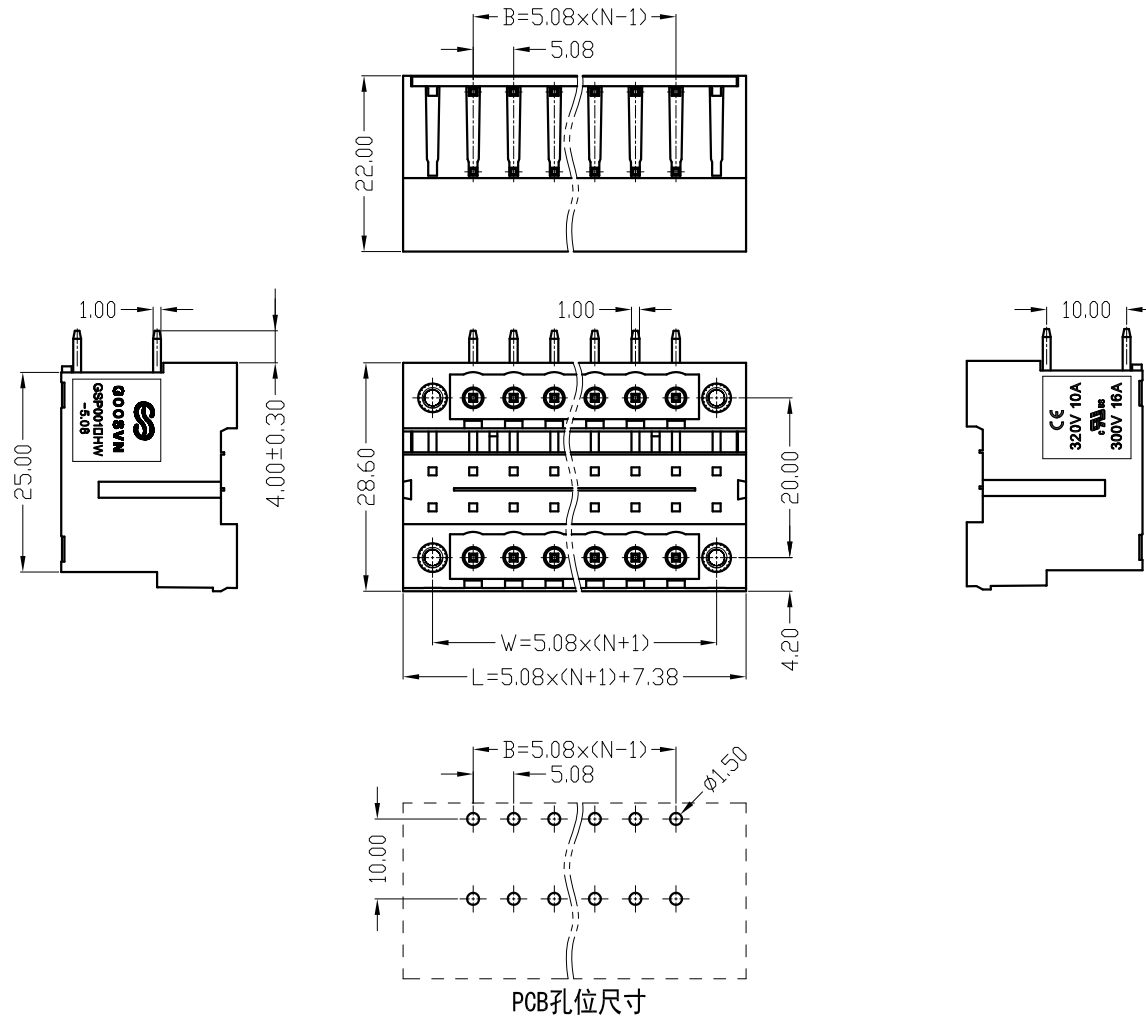

技术参数 (Technical Data)		
项目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/16A	320V/10A
压线范围 (Wire Range)	/	/
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Stripping Length)	/	
工作温度 (Temperature)	-40°C~+105°C	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
螺母 (Nut)	铜合金 (Copper alloy)	

产品命名编码:

(Product Number Code):

GSP001RHW-5.08-2*XXP-1Y-00A (H)

产品型号 (Series No.)

极数 (No. of poles)

1: 单倍间距
(Single Pitch)
2: 双倍间距
(Double Pitch)

客户需求
(Customer Request)

塑体颜色 (Housing Color)

1: 绿色 (Green) 7: 透明色
(Transparent)
2: 蓝色 (Blue) 8: 白色 (White)
3: 黑色 (Black) 9: 黄色 (Yellow)
4: 灰色 (Grey) Y: 多种颜色
5: 橙色 (Orange) (Mixed Color)
6: 红色 (Red)

P=5.08, N为孔位数 (N for hole digits), 有效位数为 (Significant digits): 2*(02P~24P)

N	2*02P	2*03P	2*04P	2*05P	2*06P	2*07P	N	2*08P	2*09P	2*10P	2*11P	2*12P	2*13P
L	22.32	27.4	32.48	37.56	42.64	47.72	L	52.80	57.88	62.96	68.04	73.12	78.20
B	5.08	10.16	15.24	20.32	25.40	30.48	B	35.56	40.64	45.72	50.80	55.88	60.96
W	15.24	20.32	25.40	30.48	35.56	40.64	W	45.72	50.80	55.88	60.96	66.04	71.12
N	2*14P	2*15P	2*16P	2*17P	2*18P	2*19P	N	2*20P	2*21P	2*22P	2*23P	2*24P	
L	83.28	88.36	93.44	98.52	103.6	108.68	L	113.76	118.84	123.92	129.00	134.08	
B	66.04	71.12	76.20	81.28	86.36	91.44	B	96.52	101.60	106.68	111.76	116.84	
W	76.20	81.28	86.36	91.44	96.52	101.60	W	106.68	111.76	116.84	121.92	127.00	

宁波高胜电子有限公司		公差范围 (Tolerance Range)	
GOOSVN NINGBO GOOSVN ELECTRONIC CO.,LTD		150~	±1.50
型号 (Type): GSP001RHW-5.08-2*XXP-1Y-00A (H)		60~150	±1.00
核准 (Approval):		30~60	±0.60
图号 (Drawing NO.):		6~30	±0.40
审核 (Audit):		0~6	±0.25
单位 (Units): mm		角度 (Angle)	X ±2°
页码 (Page): 1/1		XX	±1°
设计 (Design):		比例 (Scale): FULL	版次 (Version): T0

1

2

3

4

5

6

7

8

A

B

C

D

E