

1 2 3 4 5 6 7 8

版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)






A

B

C

D


E

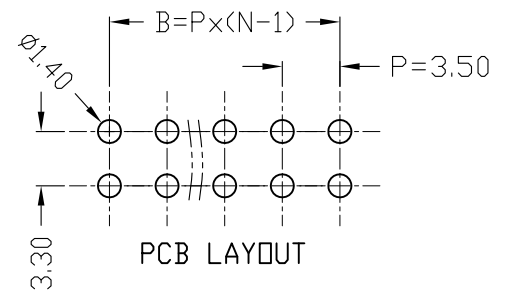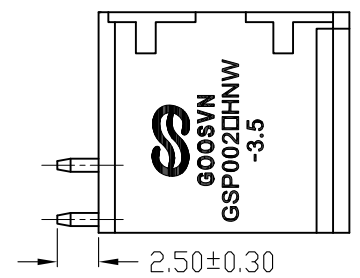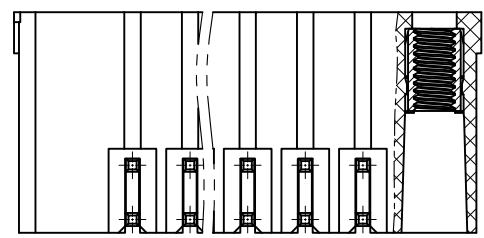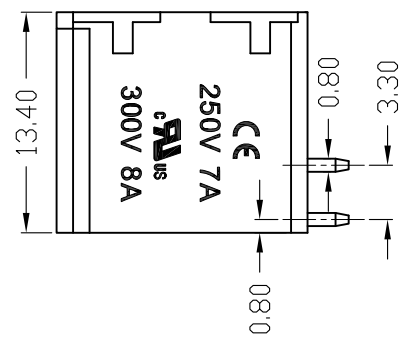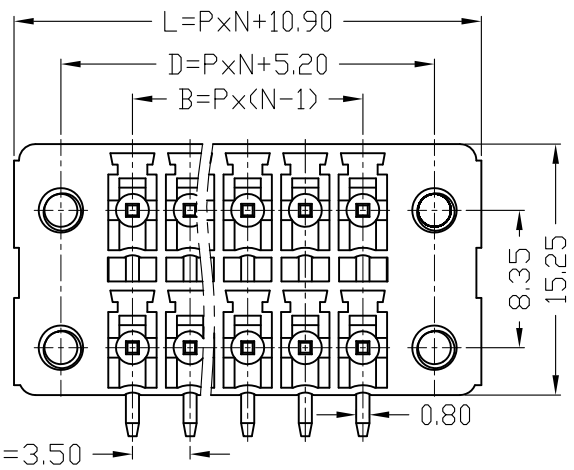

技术参数 (Technical Data)		
项目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/8A	250V/7A
压线范围 (Wire Range)	/	/
工频耐压 (Frequency Voltage)	AC 2000V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Stripping Length)	/	
工作温度 (Temperature)	-40°C ~ +105°C	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
螺母 (Nut)	铜合金 (Copper alloy)	

产品命名编码:
(Product Number Code):

GSP002RHNNW-3.5-2*XXP-1Y-00A (H)



- 1: 单倍间距 (Single Pitch)
- 2: 双倍间距 (Double Pitch)

- 1: 绿色 (Green)
- 2: 蓝色 (Blue)
- 3: 黑色 (Black)
- 4: 灰色 (Grey)
- 5: 橙色 (Orange)
- 6: 红色 (Red)
- 7: 透明色 (Transparent)
- 8: 白色 (White)
- 9: 黄色 (Yellow)
- Y: 多种颜色 (Mixed Color)

P=3.5mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 2*02P~2*24P												
N	2*02P	2*03P	2*04P	2*05P	2*06P	2*07P	2*08P	2*09P	2*10P	2*11P	2*12P	2*13P
L	17.90	21.40	24.90	28.40	31.90	35.40	38.90	42.40	45.90	49.40	52.90	56.40
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
D	12.20	15.70	19.20	22.70	26.20	29.70	33.20	36.70	40.20	43.70	47.20	50.70
N	2*14P	2*15P	2*16P	2*17P	2*18P	2*19P	2*20P	2*21P	2*22P	2*23P	2*24P	
L	59.90	63.40	66.90	70.40	73.90	77.40	80.90	84.40	87.90	91.40	94.90	
B	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	
D	54.20	57.70	61.20	64.70	68.20	71.70	75.20	78.70	82.20	85.70	89.20	

GOOSVN 宁波高胜电子有限公司
NINGBO GOOSVN ELECTRONIC CO.,LTD

型号 (Type): GSP002RHNNW-3.5-2*XXP-1Y-00A (H)

核准 (Approval):

图号 (Drawing NO.):


审核 (Audit):

单位 (Units): mm

页码 (Page): 1/1

设计 (Design):

比例 (Scale): FULL



版次 (Version): T0

公差范围 (Tolerance Range)	
150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 (Angle)	X ±2°
	XX ±1°

A

B

C

D

E

1 2 3 4 5 6 7 8